

COBALT LED CIRCULAR LUMINAIRES



PLAIN



HOOD



PLAIN AND GRILL



HOOD AND GRILL

- Can be automatically switched using Smart External Booster
- Strong die-cast LM24 aluminium body and cover frame. Graphite, full polyester powder finish as standard
- Silver or white finish options
- High efficiency satin polycarbonate diffuser
- Photocell option
- Choice of cover styles

Ra	°K	L70/B10	P/U	%	R/Rx	PF	LL/W
65	15/23W - 6000 18W - 5000	60K	P	>90	R	>0.95	15W Plain - 60.8 15W Plain and Grill - 57.8 23W Plain - 57.3 23W Plain and Grill - 54.4 18W Hood - 33.4 18W Hood and Grill - 31.7

IP66 ◆ CE IK10

RANGE

DESCRIPTION	PLAIN VERSION	HOOD VERSION	APPROX. kg	PLAIN AND GRILL VERSION	HOOD AND GRILL VERSION	APPROX. kg
15W LED	CT 14538	-	3.0	CT 14540	-	3.2
18W LED	-	CT 14441	3.0	-	CT 14504	3.2
23W LED	CT 14542	-	3.0	CT 14544	-	3.2

COLOUR OPTIONS - add suffix required: SV3 - Silver W9 - White e.g. CT 14538SV3

EMERGENCY VERSIONS - prefix catalogue number with 'ECT'.

AUTOTEST VERSIONS* - prefix catalogue number with 'TCT'.

SCANLIGHT AT VERSIONS* - prefix catalogue number with 'DCT'.

Emergency and AutoTest versions add 0.7kg to weights listed.




* For further information on AutoTest and Scanlight AT see the Thorlux main catalogue or visit www.thorlux.com






PHOTOMETRIC GUIDE

15/23W LED - PLAIN VERSION

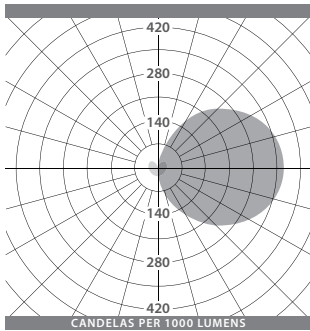

18W LED - HOOD VERSION

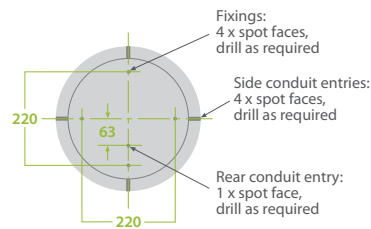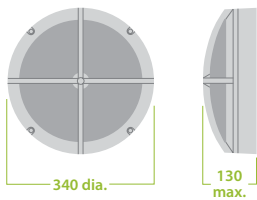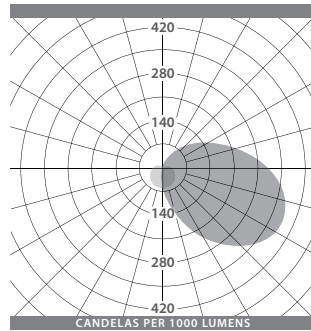

ACCESSORY

DESCRIPTION

CAT. No.

Tamper-resistant screw kit including key

CT 11699

OPTION

DESCRIPTION

SUFFIX

Photocell (hood/hood and grill only)

PC

e.g. **CT 14441PC**